



GOLD & DIAMOND DREDGES

FROM MINERS FOR MINERS

- Survey & Exploration
- Flexible Production
- Gold, Diamonds, Gold & Diamonds



Scylla Xstream

Concentrating Gold Dredge [6 inch]



**Equals
50 -60 gold
panners**

SPECIFICATION

- Double Motor (2 x 13-16 hp)
- Tsunami Nozzle: 6 Inch
- Material Hose: ø 6 inch. Length: 6 m
- All pumps and hoses included.
- Diving Suit, Regulator / Snorkel, Mask.
- Rugged High Density Polyethylene Pontoons.

SLUICE SYSTEM

Primary Sluice:
180 x 65 cm

Concentrating Sluice:
120 x 40

- Xstream Standard
- Subflow Nugget Trap
- Stream Equalizer
- Slick Plates
- Diversified Sluice Matting
- Concentrator Feeder Box
- Quick Handle Bars
- Catch Bucket
- Auto Reprocessing
- Concentrating Sluice
- Multi EXP Segment
- Hungarian Riffles

Ready for immediate operations.



Spyro Xstream

Concentrating Gold Dredge [8 inch]



**Equals
60 -80 gold
panners**

SPECIFICATION

- Double Motor (2 x 20-23hp)
- Tsunami Nozzle: 6 Inch
- Material Hose: ø 8 inch. Length: 8 m
- All pumps and hoses included.
- Diving Suit, Regulator / Snorkel, Mask.
- Rugged High Density Polyethylene Pontoons.

SLUICE SYSTEM

Primary Sluice:
260 x 85 cm

Concentrating Sluice:
140 x 40

- Xstream Standard
- Subflow Nugget Trap
- Stream Equalizer
- Slick Plates
- Diversified Sluice Matting
- Concentrator Feeder Box
- Quick Handle Bars
- Catch Bucket
- Auto Reprocessing
- Concentrating Sluice
- Multi EXP Segment
- Hungarian Riffles

Ready for immediate operations.



Scylla

Professional Gold Dredge [6 inch]



**Equals
50 -60 gold
panners**

SPECIFICATION

- Double Motor (2 x 13-16 hp)
- Tsunami Nozzle: 6 Inch
- Material Hose: ø 6 inch. Length: 6 m
- All pumps and hoses included.
- Diving Suit, Regulator / Snorkel, Mask.
- Rugged High Density Polyethylene Pontoons.

SLUICE SYSTEM

Primary Sluice:
180 x 65 cm

- Scyla Standard
- Subflow Nugget Trap
- Stream Equalizer
- Slick Plates
- Diversified Sluice Matting
- Quick Handle Bars
- Full Segmentation
- Multi EXP Segment
- Hungarian Riffles
- Plug & Play

Ready for immediate operations.



Spyro

Professional Gold Dredge [8 inch]



**Equals
60-75 gold
panners**

SPECIFICATION

- Double Motor (2 x 20-23 hp)
- Tsunami Nozzle: 8 Inch
- Material Hose: $\varnothing$ 8 inch. Length: 8 m
- All pumps and hoses included.
- Diving Suit, Regulator / Snorkel, Mask.
- Rugged High Density Polyethylene Pontoons.

SLUICE SYSTEM

Primary Sluice:
260 x 85 cm

- Spyro Standard
- Subflow Nugget Trap
- Stream Equalizer
- Slick Plates
- Diversified Sluice Matting
- Quick Handle Bars
- Full Segmentation
- Multi EXP Segment
- Hungarian Riffles
- Plug & Play

Ready for immediate operations.



Taipan

Professional Gold Dredge [4 inch]



Equals
23-32 gold
panners

SPECIFICATION

- Single Motor (9-11 hp)
- Tsunami Nozzle: 4 Inch
- Material Hose: $\varnothing$ 4 inch. Length: 5 m
- All pumps and hoses included.
- Diving Suit, Regulator / Snorkel, Mask.
- Rugged High Density Polyethylene Pontoons.

SLUICE SYSTEM

Primary Sluice:
140 x 38 cm

- Taipan Standard
- Subflow Nugget Trap
- Stream Equalizer
- Slick Plates
- Diversified Sluice Matting
- Quick Handle Bars
- Full Segmentation
- Multi EXP Segment
- Hungarian Riffles
- Plug & Play

Ready for immediate operations.



Worx Dredge

Survey Gold Dredge [2 inch]



SPECIFICATION

- + Flare
- + Suction Nozzle 2 Inch.
- + High Quality Pontoon
- + Selang, klem dan konektor.
- + Motor >2 hp dan Pompa.
- + Turnkey Ready / Siap di Pakai.
- + Most portable dredge for survey and shallow exploration purposes.

SLUICE SYSTEM

Primary Sluice:
110 cm

- + Hungarian Riffles
- + Clean Clean Out System & Handle Bars
- + Karpas 2 macam
- + Segmented sluice
- + Nugget Trap



Ready for immediate operations.



SLUICE SYSTEMS



FROM MINERS FOR MINERS

- All Scales. From small to large.
- Highest Recover Rates.
- Premium Sluicing Solutions



Explorer

Combo Highbanker [4 inch]

SPECIFICATION

- Single Motor. 9 HP.
- Material Hose: $\varnothing$ 4 inch. Length: 5 m
- Rugged Stand System
- Hopper Feeder with Grizzly Bars
- Tsunami Suction Nozzle.
- Hybrid Feed (Suction & Hopper)

SLUICE SYSTEM

Sluice: 140 x 38 cm

- XDS Standard
- Subflow Nugget Trap
- Stream Equalizer
- Slick Plates
- Diversified Sluice Matting
- Quick Handle Bars
- Full Segmentation
- Multi EXP Segment
- Hungarian Riffles
- Plug & Play

Portable. Efficient. Plug and Play.



Gold Master

Combo Highbanker [6 inch]

SPECIFICATION

- Single Motor (20 - 23 hp)
- Tsunami Nozzle: 6 Inch
- Material Hose: $\varnothing$ 6 inch. Length: 6 m
- All pumps and hoses included.
- Diving Suit, Regulator / Snorkel, Mask.
- Rugged High Density Polyethylene Pontoons.

SLUICE SYSTEM

Sluice: 340 cm

- XDS Standard
- Subflow Nugget Trap
- Stream Equalizer
- Slick Plates
- Diversified Sluice Matting
- Quick Handle Bars
- Full Segmentation
- Multi EXP Segment
- Hungarian Riffles
- Plug & Play

Portable. Efficient. Plug and Play.



Gold Master II

Combo Highbanker [6 inch]

SPECIFICATION


- Double Motor (2 x 20 - 23 hp)
- Tsunami Nozzle: 6 Inch
- Material Hose: ø 6 inch. Length: 6 m
- All pumps and hoses included.
- Diving Suit, Regulator / Snorkel, Mask.
- Rugged High Density Polyethylene Pontoons.

SLUICE SYSTEM

Sluice: 340 cm

- XDS Standard
- Subflow Nugget Trap
- Stream Equalizer
- Slick Plates
- Diversified Sluice Matting
- Quick Handle Bars
- Full Segmentation
- Multi EXP Segment
- Hungarian Riffles
- Plug & Play

Portable. Efficient. Plug and Play.

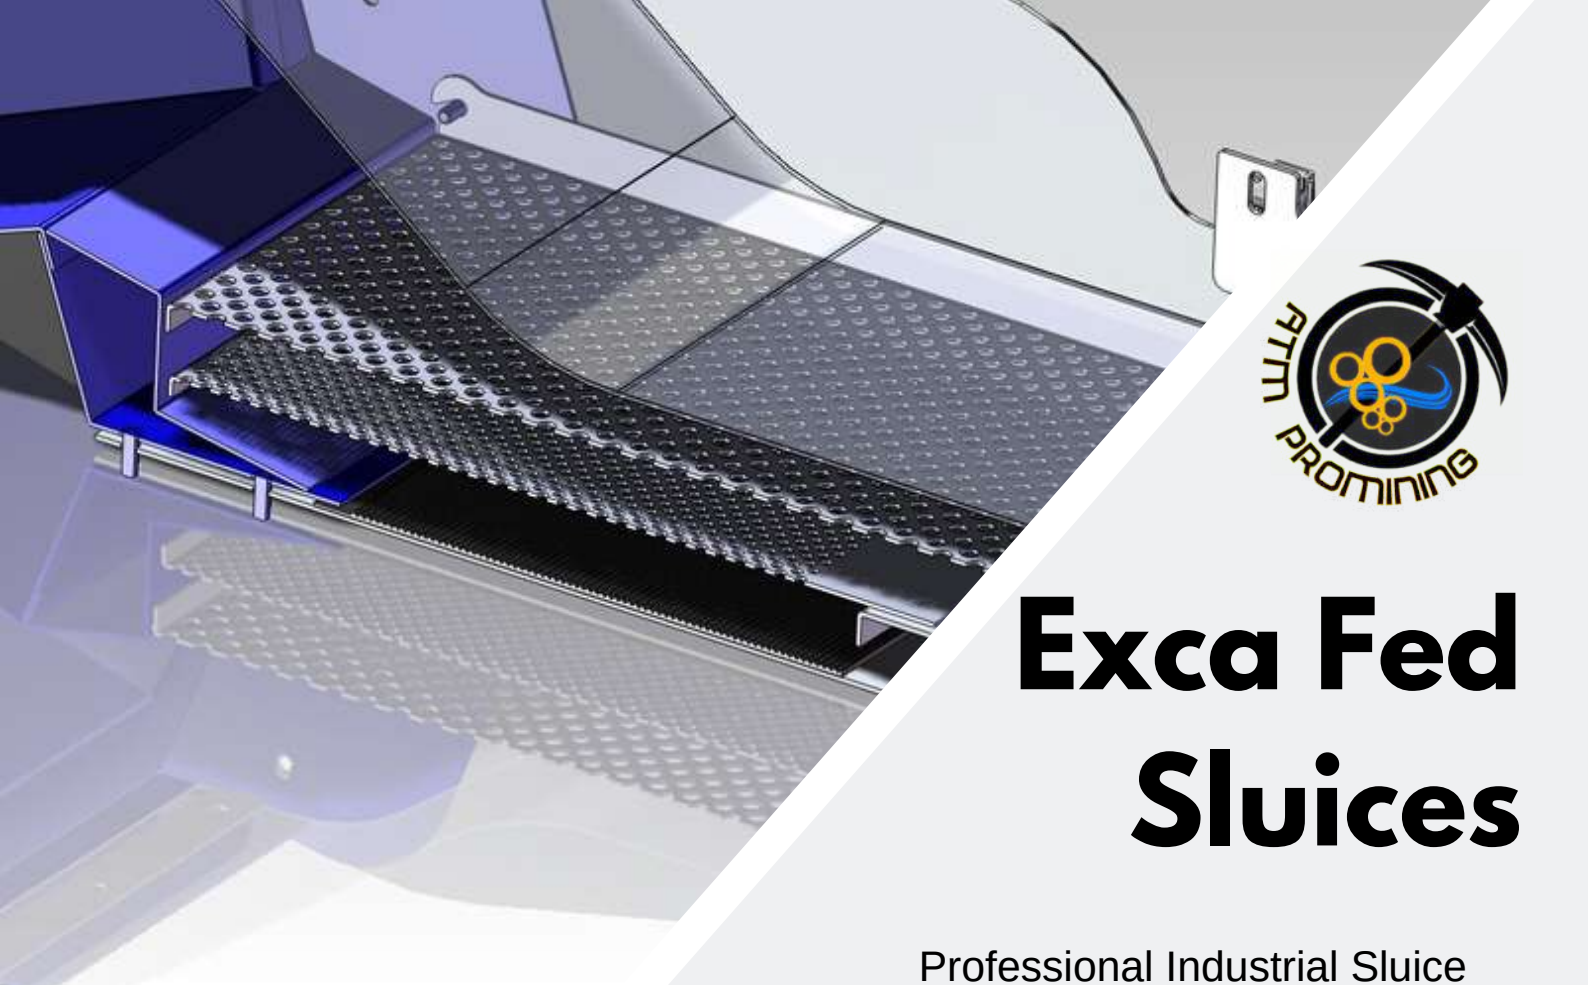

Exca Fed Sluices

Professional Industrial Sluice

SPECIFICATION



- Exca Sluice utk PC150 Single.
- Exca Sluice utk PC150 Multiple.
- Exca Sluice utk PC200 Single.
- Exca Sluice utk PC200 Multiple.
- Exca Sluice utk PC300 Single.
- Exca Sluice utk PC300 Multiple.
- Sluice utk Conveyor Feed.
- Sluice System dengan Roda atau Ski.
- Dll.

SLUICE SYSTEM

- | | |
|-------------------------------------|----------------------------|
| • XDS Standard | • <i>Quick Handle Bars</i> |
| • <i>Subflow Nugget Trap</i> | • <i>Full Segmentation</i> |
| • <i>Stream Equalizer</i> | • <i>Multi EXP Segment</i> |
| • <i>Slick Plates</i> | • <i>Hungarian Riffles</i> |
| • <i>Diversified Sluice Matting</i> | • <i>Large Scale</i> |

Portable. Efficient. Plug and Play.



Octa Sluices

Professional Industrial Sluice

SPECIFICATION



- Sluice 1: 8 meter untuk emas kasar
- Distributor Line: 12 meter dengan 3 sampai 8 outlet
- Sluice 2: 6 meter: Emas tingkat kehalusan 1
- Sluice 3: 6 meter: Emas tingkat kehalusan 2
- Sluice 4: 6 meter: Emas tingkat kehalusan 3
- Sluice 5 - 8: 6 meter per sluice. Opsional.
- Endsluice: 12 meter. Emas tingkat kehalusan 1 – 3

SLUICE SYSTEM

- XDS Standard
- Subflow Nugget Trap
- Stream Equalizer
- Slick Plates
- Diversified Sluice Matting
- Quick Handle Bars
- Full Segmentation
- Multi EXP Segment
- Hungarian Riffles
- Large Scale

Portable. Efficient. Plug and Play.